

DC40H



Most models in the 40 series have existed since our company was founded. Their quality is stable and reliable after ten years of improvement and iteration.


FEATURES

- Brushless DC motor, electronic commutation, no mechanical wear
- Compact size & high efficiency
- Long lifespan for 24 hours continuous operation
- No spark, low voltage operation, safety
- Low noise, maintenance-free
- Magnetic driven, stator coil & circuit board are entirely isolated from the liquid by the isolation layer
- Waterproof grade IP68
- Easy installation & portable
- Wide voltage operation, flexible customized functions
- Suitable for water, oil, acid, and alkali solution


MAIN SPECIFICATIONS

- Inlet (Outer diameter): 11mm
- Outlet (Outer diameter): 8mm
- Body Shell Material: PPO
- Cover Shell Material: PA66+30%GF
- Impeller Material: POM
- Dimensions: 84.5×61.8×43.8mm
- Weight: about 220 g
- Max Working Temperature: 60°C


PERFORMANCE CURVE

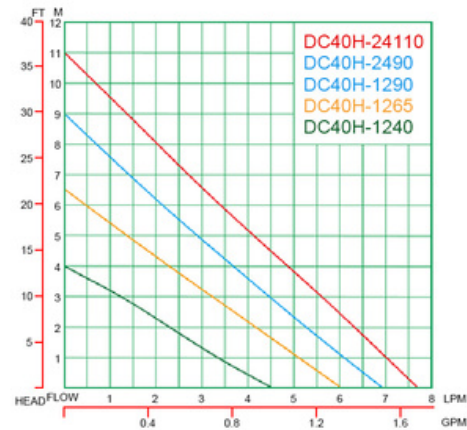

DIMENSIONS

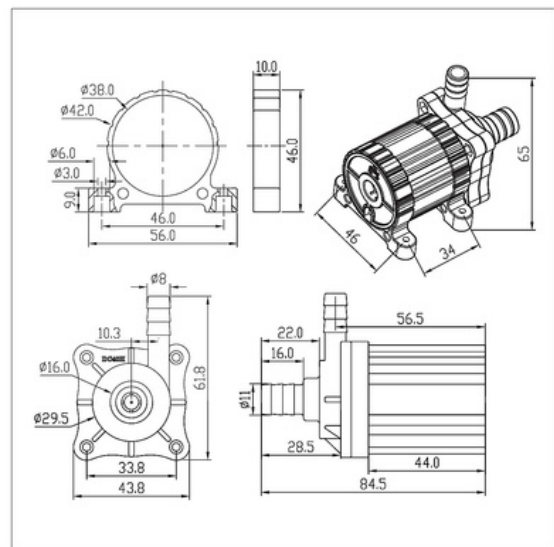

MODEL CODE INSTRUCTION

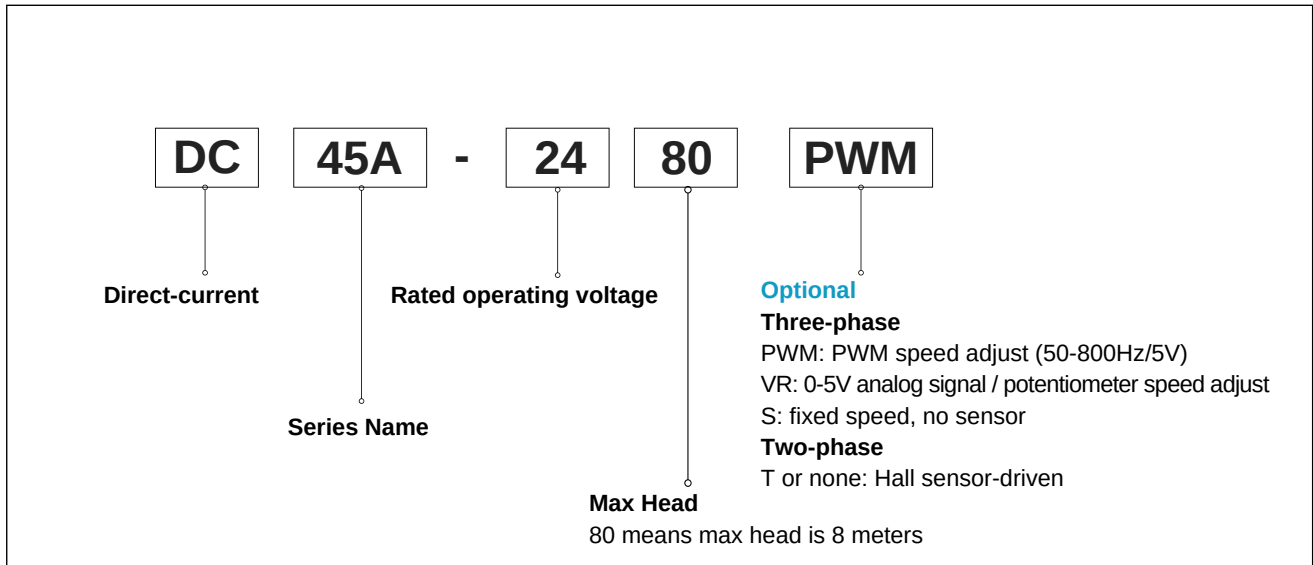

MODE LIST

Model	Rated Voltage	Operating Voltage Range	Rated Current	Max Flow	Max Head
DC40H-1240	DC12V	DC5-12V	0.5A	270L/H	4M
DC40H-1265	DC12V	DC5-12V	1.2A	360L/H	6.5M
DC40H-1890	DC18V	DC5-18V	1.2A	420L/H	9M
DC40H-2490	DC24V	DC12-26V	0.9A	420L/H	9M
DC40H-24110	DC24V	DC12-26V	1.2A	450L/H	11M

